

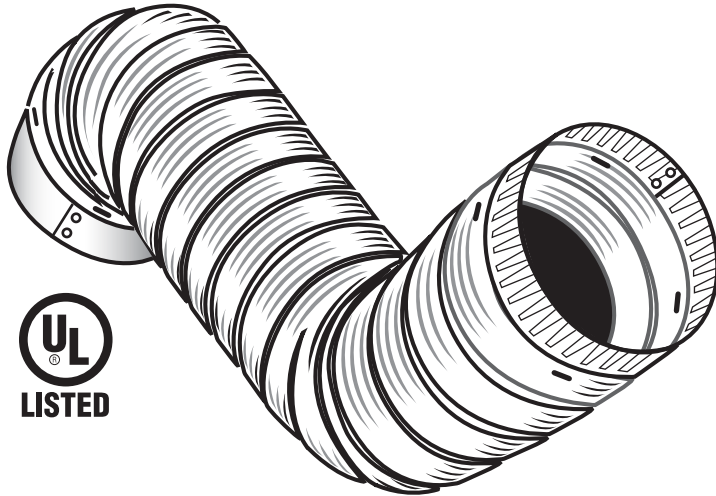


### Semi Rigid Flexible Metallic Duct with Galvanized Collars UL Listed, Class O Air Duct

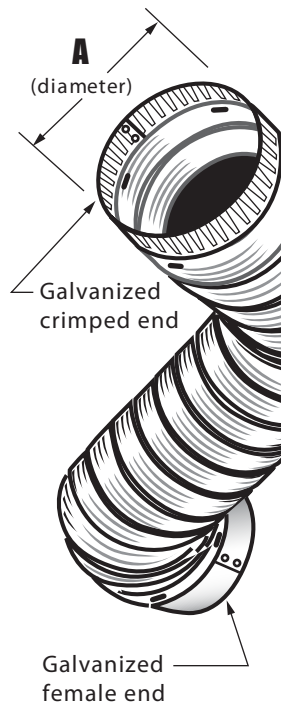

AOUL...GC

### Pressure Loss Diagram

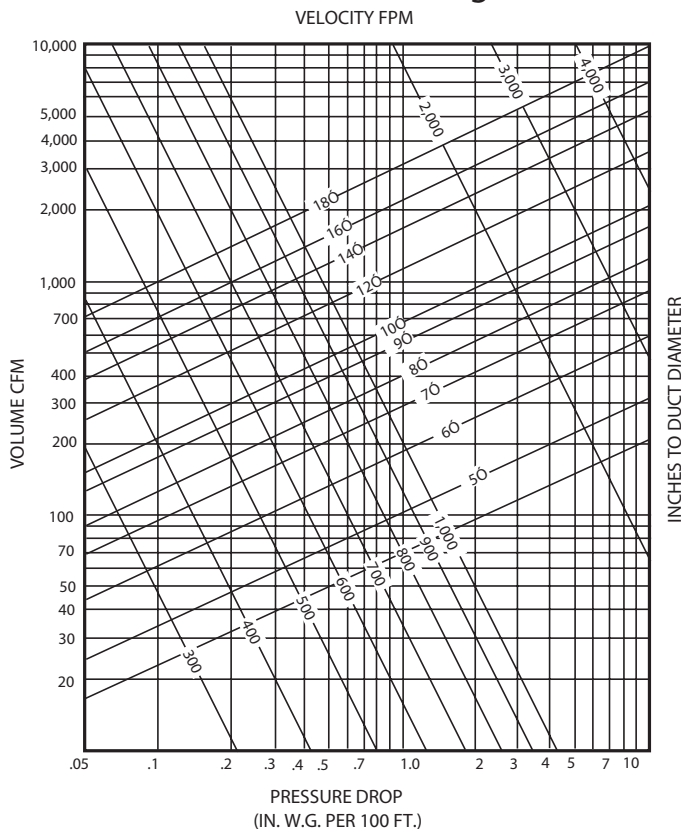

Model No.	Description
AOUL0310GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL038GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL036GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL0410GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL048GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL046GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL0510GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL058GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL0610GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL068GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL0710GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL078GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL0810GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL088GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL1010GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends
AOUL108GC	Semi Rigid Flex. Alum. Duct, Galv. Male/Female Ends

### Performance Data

for uninsulated aluminum flexible duct

#### Maximum Velocity

- 5000 FPM / 25 m/sec
- near zero permeability and leakage

#### Maximum Rated Pressures

- 3" - 10" dia., 12" w.c / 3 Kpa Pos/Neg

#### Operating Temperature Range

- -100°F to 430°F, -73°C to 221°C intermittent

#### Class O Air Duct, UL 181

#### Flame Spread/Smoke Developed

- 0/0

### General Information

- flexes in any directions for easy installation
- material description: aluminum duct - collar: 3"W x 28 ga. galv. metal
- non-combustible
- multiple use duct - our semi rigid flexible duct can be used for exhaust venting
- will not sag between 6 foot supports
- consult with your Authority Having Jurisdiction on the use of this product

Model No.	A	Length
AOUL0310GC	3" dia. (7.6 cm)	10 ft. (3 m)
AOUL038GC	3" dia. (7.6 cm)	8 ft. (2.4 m)
AOUL036GC	3" dia. (7.6 cm)	6 ft. (1.8 m)
AOUL0410GC	4" dia. (10.2 cm)	10 ft. (3 m)
AOUL048GC	4" dia. (10.2 cm)	8 ft. (2.4 m)
AOUL046GC	4" dia. (10.2 cm)	6 ft. (1.8 m)
AOUL0510GC	5" dia. (12.7 cm)	10 ft. (3 m)
AOUL058GC	5" dia. (12.7 cm)	8 ft. (2.4 m)
AOUL0610GC	6" dia. (15.2 cm)	10 ft. (3 m)
AOUL068GC	6" dia. (15.2 cm)	8 ft. (2.4 m)
AOUL0710GC	7" dia. (17.7 cm)	10 ft. (3 m)
AOUL078GC	7" dia. (17.7 cm)	8 ft. (2.4 m)
AOUL0810GC	8" dia. (20.3 cm)	10 ft. (3 m)
AOUL088GC	8" dia. (20.3 cm)	8 ft. (2.4 m)
AOUL1010GC	10" dia. (25.4 cm)	10 ft. (3 m)
AOUL108C	10" dia. (25.4 cm)	8 ft. (2.4 m)