


### Semi Rigid Flexible Metallic Duct with Plain Ends - UL Listed, Class O Air Duct

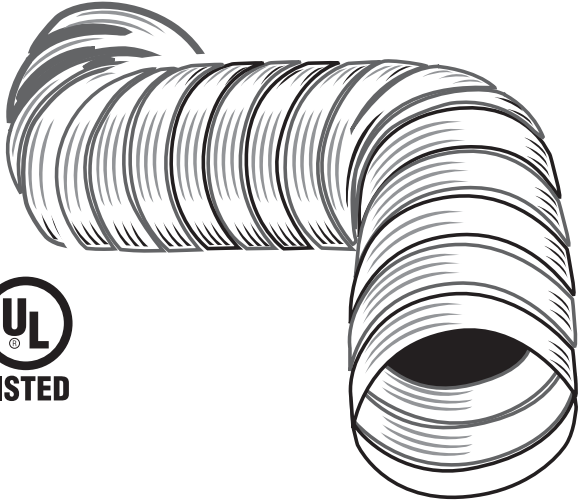

### Semi Rigid Flexible Metallic Duct with Plain Ends

Model No.	Description
AOUL0310	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL038	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL036	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL0410	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL048	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL046	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL0510	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL058	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL0610	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL068	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL0710	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL078	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL0810	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL088	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL1010	Semi Rigid Flex. Alum. Duct, Plain Ends
AOUL108	Semi Rigid Flex. Alum. Duct, Plain Ends

### Performance Data

for uninsulated aluminum flexible duct

#### Maximum Velocity

- 5000 FPM / 25 m/sec
- near zero permeability and leakage

#### Maximum Rated Pressures

- 3" - 10" dia., 12" w.c / 3 Kpa Pos/Neg


#### Operating Temperature Range

- -100°F to 430°F, -73°C to 221°C intermittent

#### Class O Air Duct, UL 181


#### Flame Spread/Smoke Developed

- 0/0

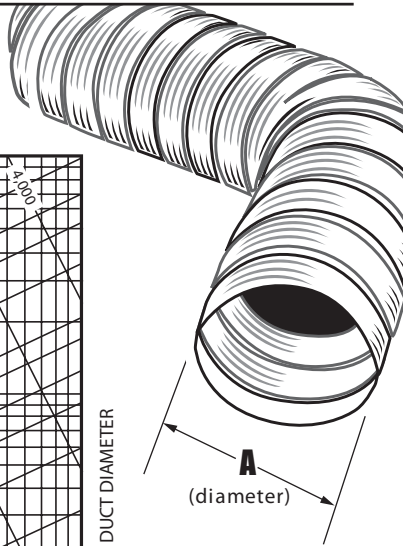

### Pressure Loss Diagram

VELOCITY FPM

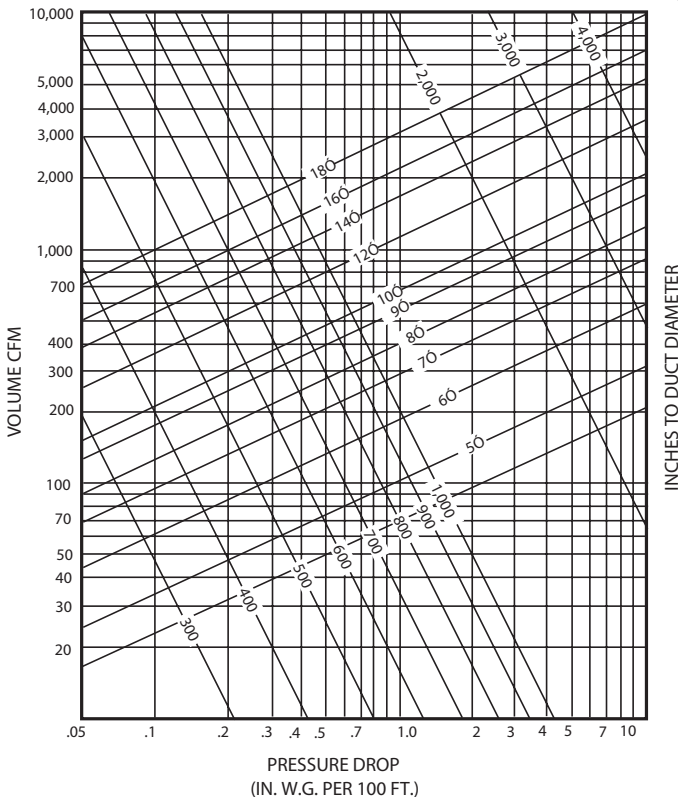

### General Information

- flexes in any directions for easy installation
- material description: common name - aluminum alloy
- non-combustible
- multiple use duct - our semi rigid flexible duct can be used for exhaust venting
- will not sag between 6 foot supports
- consult with your Authority Having Jurisdiction on the use of this product

Model No.	A	length
AOUL0310	3" dia. (7.6 cm)	10 ft. (3 m)
AOUL038	3" dia. (7.6 cm)	8 ft. (2.4 m)
AOUL036	3" dia. (7.6 cm)	6 ft. (1.8 m)
AOUL0410	4" dia. (10.2 cm)	10 ft. (3 m)
AOUL048	4" dia. (10.2 cm)	8 ft. (2.4 m)
AOUL046	4" dia. (10.2 cm)	6 ft. (1.8 m)
AOUL0510	5" dia. (12.7 cm)	10 ft. (3 m)
AOUL058	5" dia. (12.7 cm)	8 ft. (2.4 m)
AOUL0610	6" dia. (15.2 cm)	10 ft. (3 m)
AOUL068	6" dia. (15.2 cm)	8 ft. (2.4 m)
AOUL0710	7" dia. (17.7 cm)	10 ft. (3 m)
AOUL078	7" dia. (17.7 cm)	8 ft. (2.4 m)
AOUL0810	8" dia. (20.3 cm)	10 ft. (3 m)
AOUL088	8" dia. (20.3 cm)	8 ft. (2.4 m)
AOUL1010	10" dia. (25.4 cm)	10 ft. (3 m)
AOUL108	10" dia. (25.4 cm)	8 ft. (2.4 m)