



Semi Rigid Flexible Aluminum Duct - Class O, Flexible Air Duct

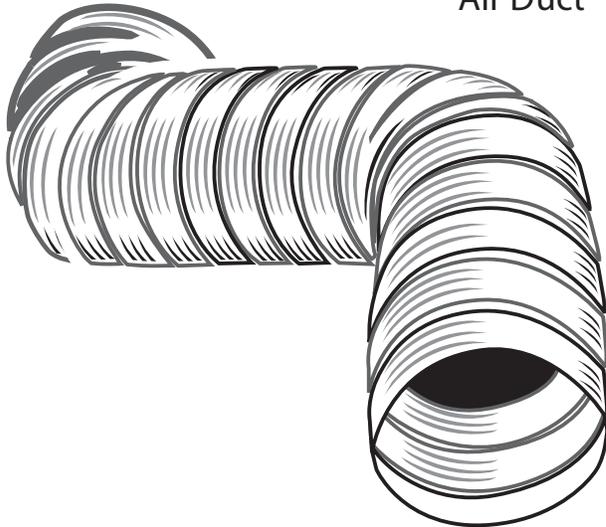

Semi Rigid Flexible Aluminum Duct

Model No.	A	length
AFD0310	3" dia.	10' (3m)
AFD0410	4" dia.	10' (3m)
AFD0510	5" dia.	10' (3m)
AFD0610	6" dia.	10' (3m)
AFD0310BLK	3" dia.	10' (3m)
AFD0410BLK	4" dia.	10' (3m)
AFD0510BLK	5" dia.	10' (3m)
AFD0610BLK	6" dia.	10' (3m)
AFD0710BLK	7" dia.	10' (3m)
AFD0810BLK	8" dia.	10' (3m)
AFD1010BLK	10" dia.	10' (3m)
AFD1210BLK	12" dia.	10' (3m)
AFD1410BLK	14" dia.	10' (3m)

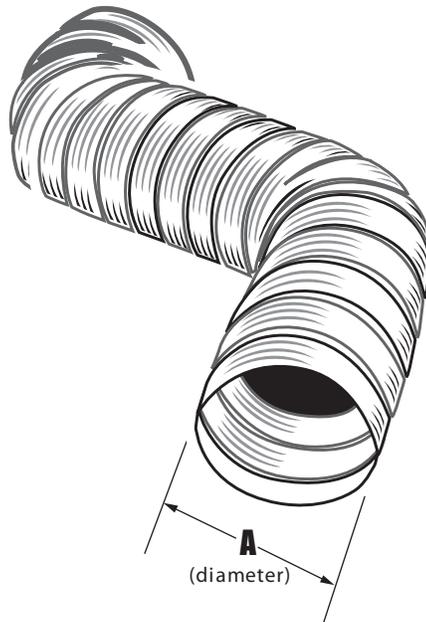

Model No.	Pack	Description	Cs Pk
AFD0310	Box	3" x 10' duct	52
AFD0410	Box	4" x 10' duct	30
AFD0510	Box	5" x 10' duct	16
AFD0610	Box	6" x 10' duct	14
AFD0310BLK	Bulk	3" x 10' duct	1
AFD0410BLK	Bulk	4" x 10' duct	1
AFD0510BLK	Bulk	5" x 10' duct	1
AFD0610BLK	Bulk	6" x 10' duct	1
AFD0710BLK	Bulk	7" x 10' duct	1
AFD0810BLK	Bulk	8" x 10' duct	1
AFD1010BLK	Bulk	10" x 10' duct	1
AFD1210BLK	Bulk	12" x 10' duct	1
AFD1410BLK	Bulk	14" x 10' duct	1

Performance Data

for uninsulated aluminum flexible duct

Maximum Velocity

- 5000 FPM

Maximum Rated Pressures

- 3" - 8" dia., 6" w.g. Pos/Neg

Operating Temperature Range

- -100°F to 430°F

Class O Air Duct, Flexible

Flame Spread/Smoke Developed

- 0/0

General Information

RECOMMENDED DUCT BY DRYER
MANUFACTURERS FOR DRYER VENTING

- pure aluminum metal duct
- 8 foot lengths compress to 28 inches
- 25 foot lengths compress to 88 inches
- material description:
common name - aluminum alloy
trade name - aluminum alloy 3003
- a multiple use product, our semi-rigid flexible ducting can be used for exhaust venting, bathroom vents, clothes dryers