

Supurr-Flex® pure aluminum, multi-layered flexible metallic duct - UL Listed, Clothes Dryer Transition Duct



F0 Duct



Supurr-Flex® Clothes Dryer Transition Duct

Model No.	Description
F0405B	Supurr-Flex® multi-layered flexible duct
F0408B	Supurr-Flex® multi-layered flexible duct
FC0405B	Supurr-Flex® multi-layered flexible duct
FC0408B	Supurr-Flex® multi-layered flexible duct

Performance Data

for uninsulated aluminum, multi-layered flexible metallic duct

Maximum Velocity

- 5000 FPM / 25m/sec

Maximum Rated Pressures

- all diameters 10" W.C/ 2.5Kpa Pos.
- 3"-6" dia. (7.6-15.2cm), .5" W.C/.12 Kpa Neg.

Operating Temperature Range


- 0 F to 265 F/-18C to 130C Intermittent "F0"

- UL Listed Clothes Dryer Transition Duct Listing No.: 2158A

General Information

- available in 4"(101mm) dia and lengths of 5'(1.5m) and 8'(2.4m)
- UL Listed on this product is for installations of 8 ft.(2.4m) or less
- best for clothes dryer duct, fresh air intake and non-insulated ventilation duct
- fire resistant

Pressure Loss Diagram

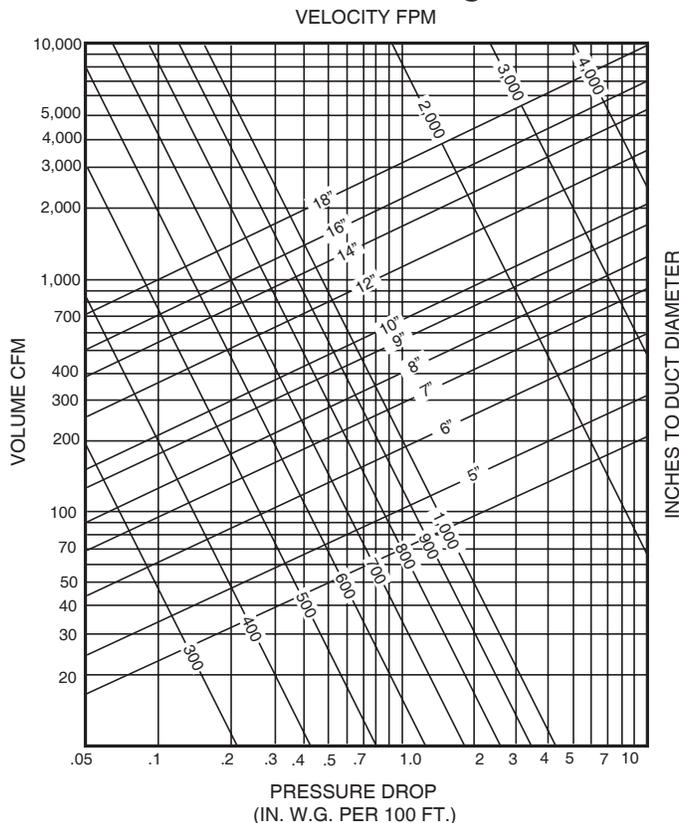

Clamps available with
FC0405B
&
FC0408B



Model No.	A	length	notes
F0405B	4" dia. 10.2cm	5' 1.5m	
F0408G	4" dia. 10.2cm	8' 2.4	
FC0405B	4" dia. 10.2	5' 1.5m	with plastic clamps
FC0408B	4" dia. 10.2cm	8' 2.4m	with plastic clamps