


### Dryer Vent Kit - Supurr Guard® Hood with pipe & collar , Supurr-Flex® Clothes Dryer Transition Duct, & (2) clamps

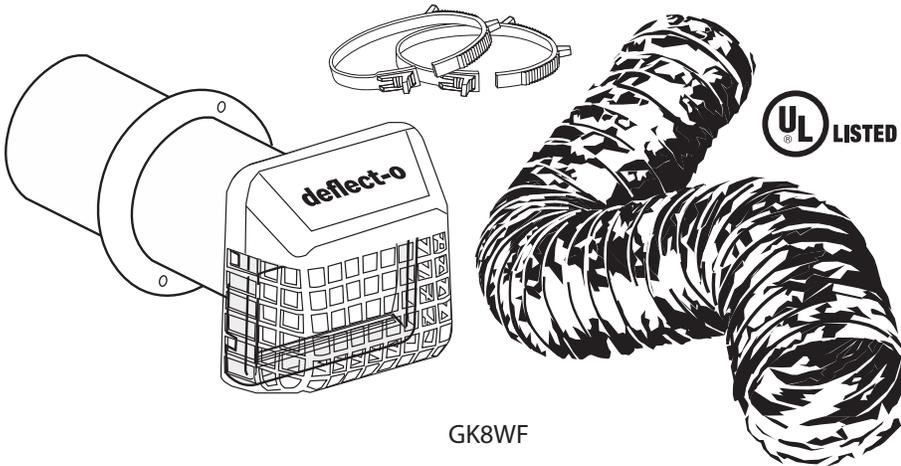

Model No.	Description	Color
GK8WF	8ft(2.4m) DryerVent Kit	White

#### Performance Data

for plastic molded louvered vent hoods

##### Hood

- Calcium filled Polypropylene
- Melting point: 325 ° F/ 163 C approx.
- UV Inhibitor added

##### Pipe

- Aluminum

##### Collar

- Styrene

##### Clamps

- 4" (10.1 cm) dia., polypropylene plastic

##### Duct

- 4" dia. Supurr-Flex® Clothes Dryer Transition Duct, aluminum flexible

##### Operating Temperature Range

- 0 F to 265°F / -18 C to 130 C Intermittent


#### General Information

##### Supurr-Flex® Duct

- fire resistant, flexible duct

##### Supurr Guard® Hood

- durable, weather resistant, limited lifetime guaranteed
- hood louvered dampers operates quietly for maximum exhaust air flow and seals when not in operation to help prevent back drafts
- removable bird guard helps prevent birds and rodents from entering home through your dryer vent

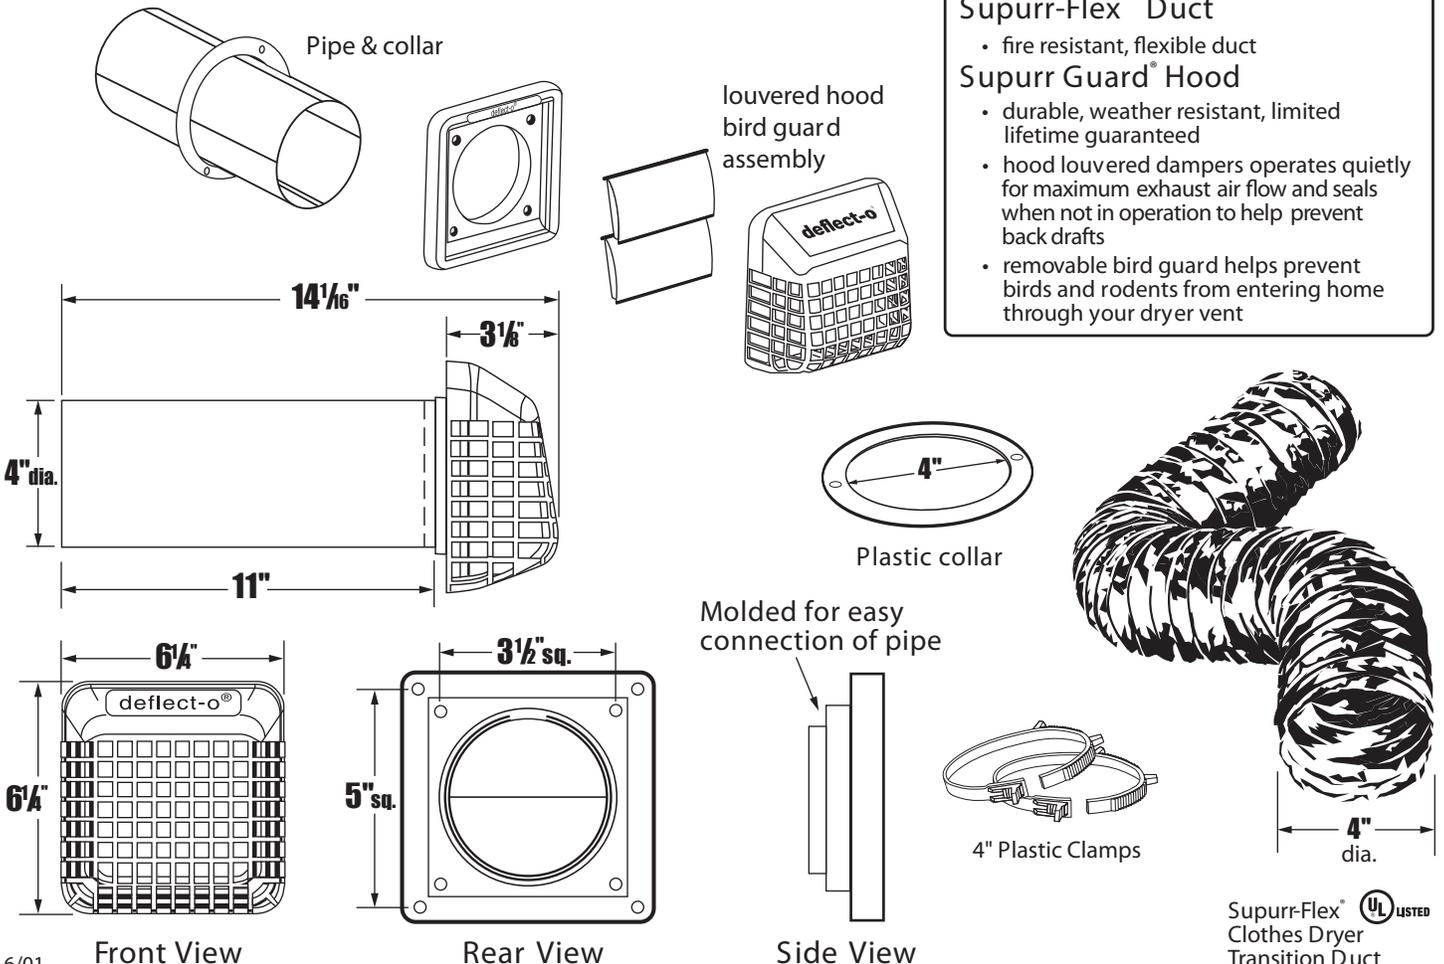

6/01

© 2001

DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2 • www.advp-deflecto.com

DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.