


PBP - Black Pipe - 24 gauge Stove Pipe, crimped




PBP

| Model No. | A | B |
|-----------|---------|-----|
| PBP42424 | 4" dia. | 24" |
| PBP53624 | 5" dia. | 36" |
| PBP52424 | 5" dia. | 24" |
| PBP51824 | 5" dia. | 18" |
| PBP51224 | 5" dia. | 12" |
| PBP63624 | 6" dia. | 36" |
| PBP63024 | 6" dia. | 30" |
| PBP62424 | 6" dia. | 24" |
| PBP61824 | 6" dia. | 18" |
| PBP61224 | 6" dia. | 12" |
| PBP73624 | 7" dia. | 36" |
| PBP73024 | 7" dia. | 30" |
| PBP72424 | 7" dia. | 24" |
| PBP71824 | 7" dia. | 18" |
| PBP71224 | 7" dia. | 12" |
| PBP83624 | 8" dia. | 36" |
| PBP83024 | 8" dia. | 30" |
| PBP82424 | 8" dia. | 24" |
| PBP81824 | 8" dia. | 18" |
| PBP81224 | 8" dia. | 12" |



LOCK TYPE "B"
MODIFIED REEVES SNAPLOCK

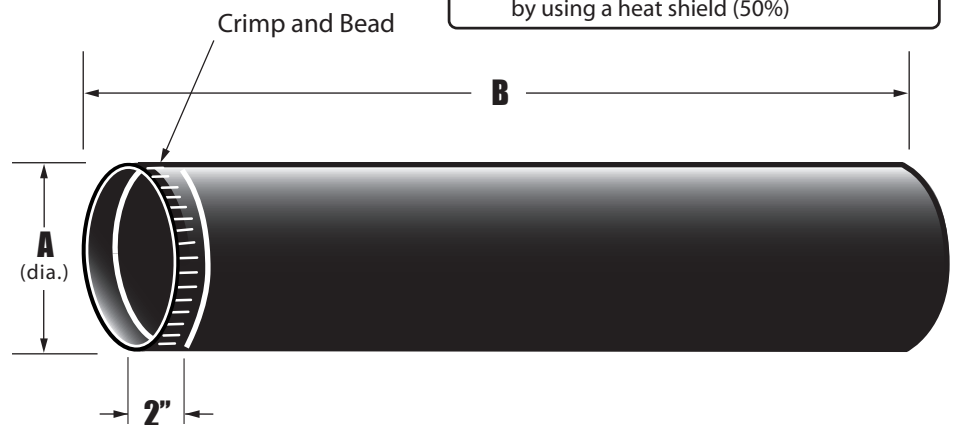

| Model No. | Description |
|-----------|-----------------------------------|
| PBP42424 | 4"x 24" black stove pipe, crimped |
| PBP53624 | 5"x 36" black stove pipe, crimped |
| PBP52424 | 5"x 24" black stove pipe, crimped |
| PBP51824 | 5"x 18" black stove pipe, crimped |
| PBP51224 | 5"x 12" black stove pipe, crimped |
| PBP63624 | 6"x 36" black stove pipe, crimped |
| PBP63024 | 6"x 30" black stove pipe, crimped |
| PBP62424 | 6"x 24" black stove pipe, crimped |
| PBP61824 | 6"x 18" black stove pipe, crimped |
| PBP61224 | 6"x 12" black stove pipe, crimped |
| PBP73624 | 7"x 36" black stove pipe, crimped |
| PBP73024 | 7"x 30" black stove pipe, crimped |
| PBP72424 | 7"x 24" black stove pipe, crimped |
| PBP71824 | 7"x 18" black stove pipe, crimped |
| PBP71224 | 7"x 12" black stove pipe, crimped |
| PBP83624 | 8"x 36" black stove pipe, crimped |
| PBP83024 | 8"x 30" black stove pipe, crimped |
| PBP82424 | 8"x 24" black stove pipe, crimped |
| PBP81824 | 8"x 18" black stove pipe, crimped |
| PBP81224 | 8"x 12" black stove pipe, crimped |

Performance Data

for 24 gauge black stove pipe, crimped

Materials

- 24 gauge (.6mm) black steel
- 6"(15.2cm), 7"(17.8cm), & 8"(20.3cm)
- 12"(.3m), 18"(.45m), & 24"(.6m) lengths

General Information

- heavy gauge pipe commonly used to vent wood burning stoves
- conveniently crimped one end to attach individual lengths
- minimum clearance to combustible material is 18"
- clearance to combustibles can be reduced by using a heat shield (50%)