


SPODC- Spin On Collar with Spring Loaded Handle - Galvanized


used to connect main HVAC duct line

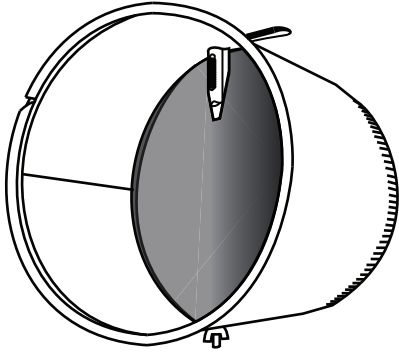

Code	Description
SPODC04	Galv.Spin On Collar w/spring loaded damper & handle,4"dia x 5" long x 28ga
SPODC05	Galv.Spin On Collar w/spring loaded damper & handle,5"dia x 5" long x 28ga
SPODC06	Galv.Spin On Collar w/spring loaded damper & handle,6"dia x 5" long x 28ga
SPODC07	Galv.Spin On Collar w/spring loaded damper & handle,7"dia x 5" long x 28ga
SPODC08	Galv.Spin On Collar w/spring loaded damper & handle,8"dia x 5" long x 28ga
SPODC09	Galv.Spin On Collar w/spring loaded damper & handle,9"dia x 5" long x 26ga
SPODC10	Galv.Spin On Collar w/spring loaded damper & handle,10"dia x 5" long x 26ga
SPODC12	Galv.Spin On Collar w/spring loaded damper & handle,12"dia x 5" long x 26ga
SPODC14	Galv.Spin On Collar w/spring loaded damper & handle,14"dia x 5" long x 26ga
SPODC16	Galv.Spin On Collar w/spring loaded damper & handle,16"dia x 5" long x 26ga

Spin on starting notch

Spring loaded handle

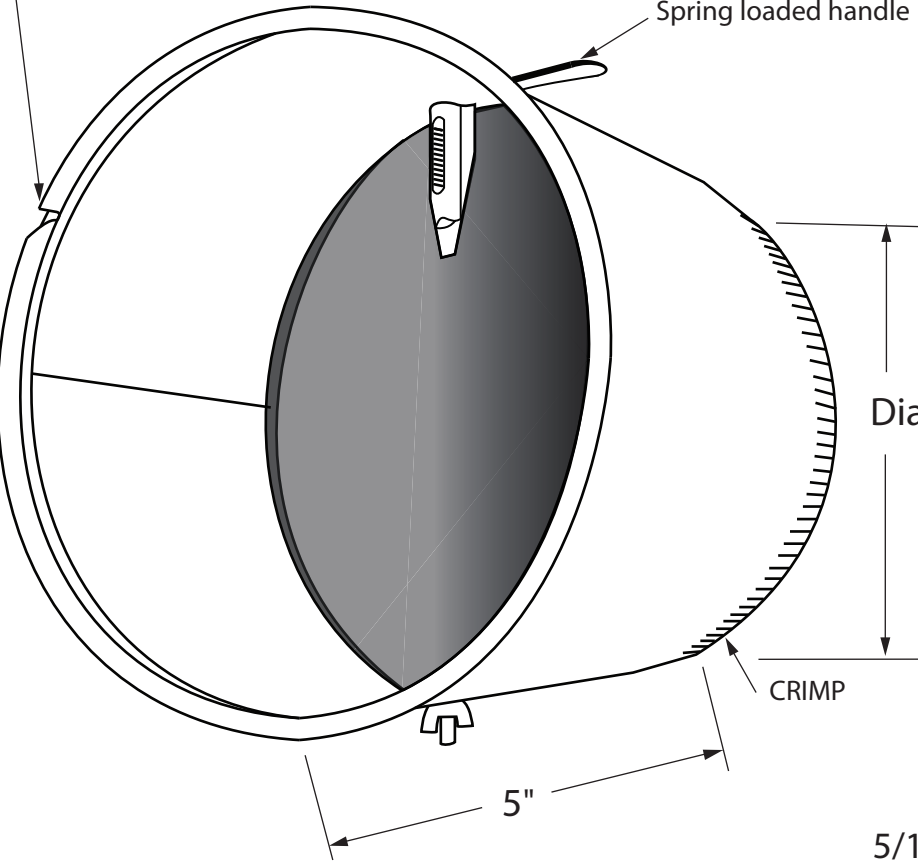

Performance Data


for galvanized HVAC collar

Material

- all galvanized 28 & 26ga
- c/w galvanized spring loaded handle
- included volume damper

General Information

- allows flex duct connection to spin on collar
- allows for fine air flow adjustments
- lock-in air flow adjustment using wingnut
- high profile spin on flange assures for a secure connection to duct work

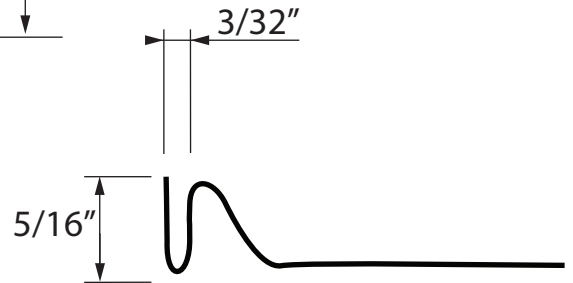

Section View of spin on flange